




Hillsdale Terminal

8 A.W.G. Vinyl Rings

Phone - 1-800-447-3150

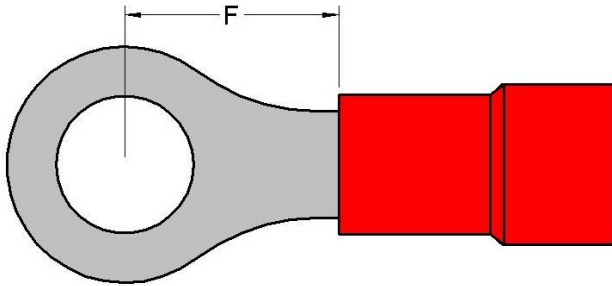

- Alloy 110 Copper .044 thickness
- Rigid PVC Insulator
- Electro-Tin-Plated Terminal .00025"-.0004"
- Max Wire diameter .18

Part #	Stud Size	Barrel Length	Over all Length	W	Stud Diameter (SD)	F	Voltage
50608	#8	.330	1.25	.375	.173/.175	.358	600V
50609	#8-10	.330	1.22	.375	.197/.200	.358	600V
50610	#8-10	.330	1.27	.472	.197/.200	.358	600V
50611	#12-1/4	.330	1.27	.472	.262/.265	.358	600V
50612	5/16	.330	1.50	.590	.340/.343	.535	600V
50613	3/8	.330	1.50	.590	.389/.391	.535	600V
50614	1/2	.330	1.66	.780	.515/.520	.620	600V

All dimensions are in "inches"

Recommended:

- 75° C Max. Temperature Rating
- One crimp required
- Solid or Stranded wire

- Crimp tool HT Hex Crimp Jr. (20701)
- Strip Length 15/32"

WARNING! Installation of electrical wire and terminals can be hazardous if done improperly. Improper use can result in personal injury or property damage. For safe wiring practices, consult National Electrical Code and/or your local building inspector. A licensed electrical contractor or engineer must be consulted to determine that the correct wire and terminal size is used and that it is properly and safely installed for all applications.

All statements, procedural information, and recommendations related to Hillsdale Terminal's products are based on data believed to be reliable, but the precision or completeness is not definite. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You accept all risks and liability associated with such use. Any statements related to the product which are not in Hillsdale Terminal's current publications shall have no force or effect unless expressly agreed upon, in writing, by a sanctioned member of Hillsdale Terminal.